

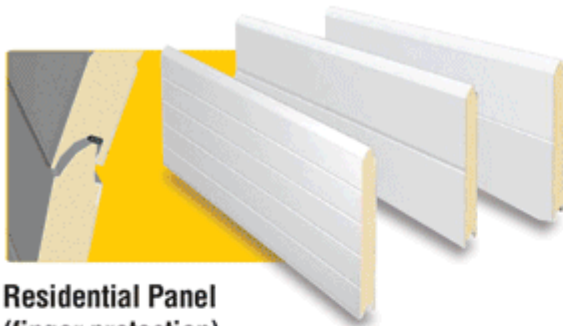


Semforce Sectional Garage Doors

are manufactured with, **Finger Protection Security panels.**

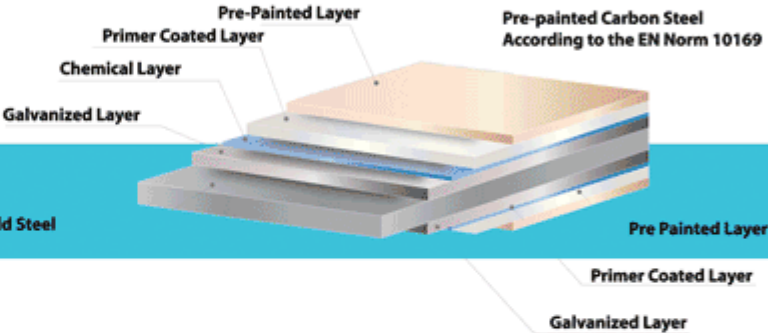

Residential Panel (finger protection)

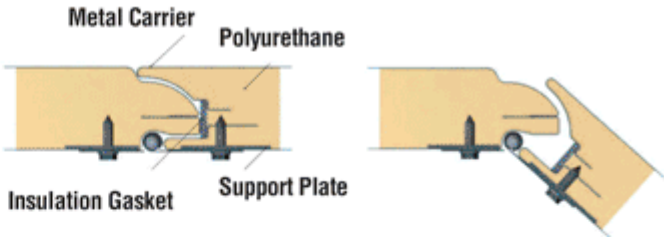

Coated Layers

Panel Pattern and colour choices

Panel patterns are Stucco pattern, ribbed pattern, smooth design and wooden face pattern. RAL Codes can be applied, as per our customers' requests



Tecnical Information

It consists of double skinned section of hot galvanized metal . The thick insulating core of 100% CFC free does not pollute the environment according to ISO 3582 . The double-skinned sections are 40 mm thick throughout . The required heights of panels are 500 mm and 610 mm .

Physical and chemical characteristics of the panel polyurethane :

- **Density** : $d = 40$ (ISO 845)
- **Coefficient of heat**
- **insulation** : $k = 0,45$
- **Wind pressure**: 1400 Pa
- **Fire resistance** : Self – extinction of class B2 (DIN 4102)
- **Noise suppression** : 26 dB (DIN 52210)
- **Weight of panel** : 12 kg /m²

Technical specifications of the coating :

- **Coating thickness of the external surface** : 25 3 μm
- **Coating thickness of the internal surface** : 5 μm